

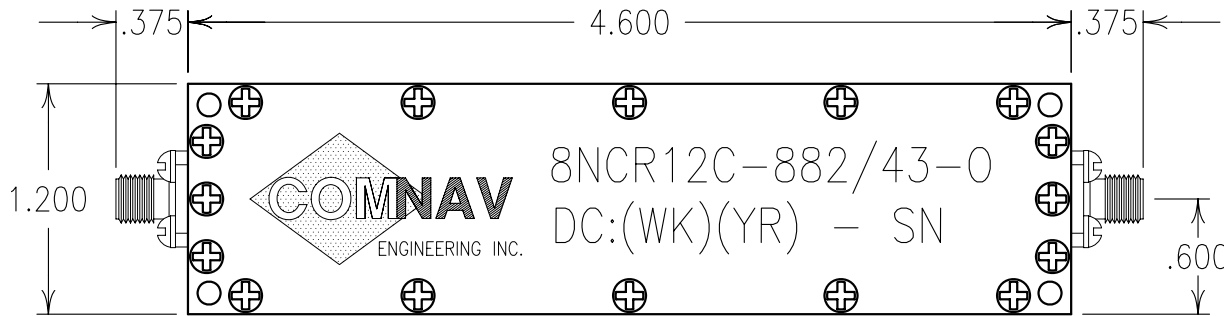


2


1

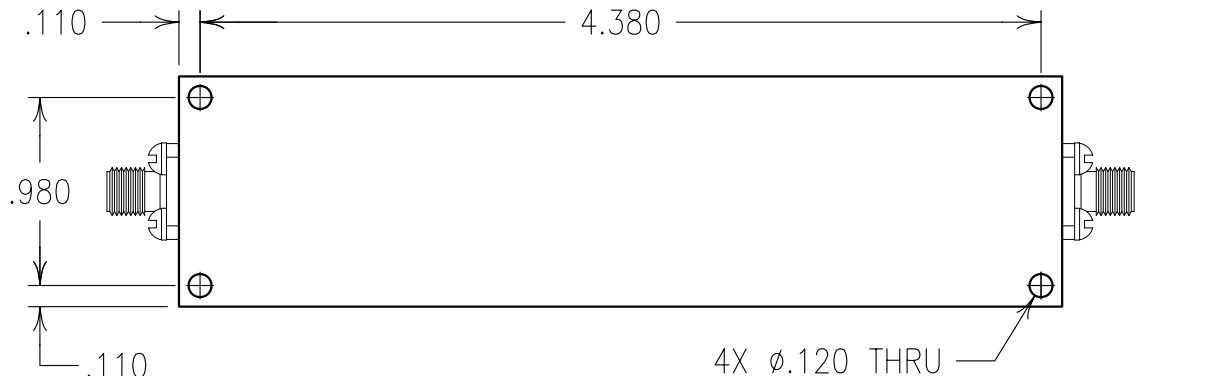

ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	881.5 MHz
3 dB BANDWIDTH:	43 MHz NOM
PASSBAND:	DC-820, 920-1500 MHz
PASSBAND LOSS:	<1.0 dB
PASSBAND VSWR:	1.7:1
40 dBc REJECTION:	869-894 MHz

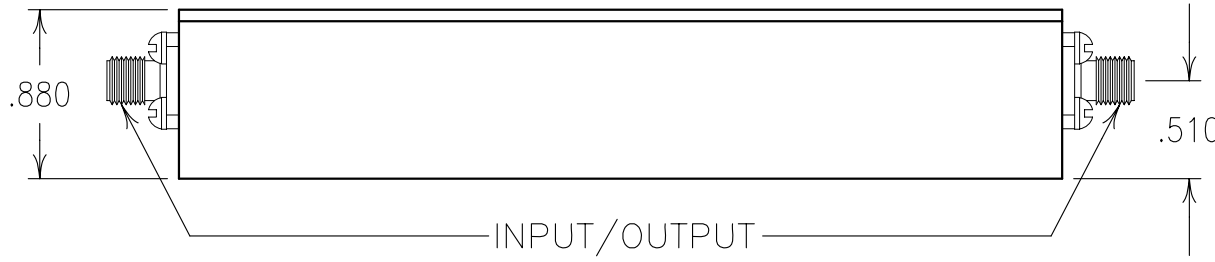

COPY

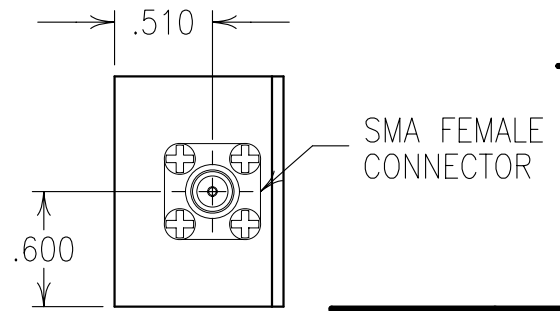

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

NOTES:

ENGLISH / METRIC ENGLISH		CHECKED BY					
TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY					
MACHINED SURFACES TO BE 125 / OR BETTER		PBF					
REMOVE ALL BURRS		ENGINEER		II 10MAR04 MJG DEV.		INI. ISS. PER 2203	
		MJG		REV DATE BY DCN No.		REMARKS	
ENGLISH (INCHES)	METRIC (MM)	SCALE 1:1		APPLIC: CERAMIC COAXIAL FILTER			
.XX ±.01	.X ±.2	DATE 01APR04		TITLE: 8NCR12C-882/43-0			
.XXX ±.005	.XX ±.13			DRAWING No.		SHEET OF 1 1	
ANGLES ± 0° 30'		MATERIAL: COVER: ALUMINUM BASE: ALUMINUM		0L0533			
		FINISH: COVER: NICKEL PLATE BASE: NICKEL PLATE					