


2

1

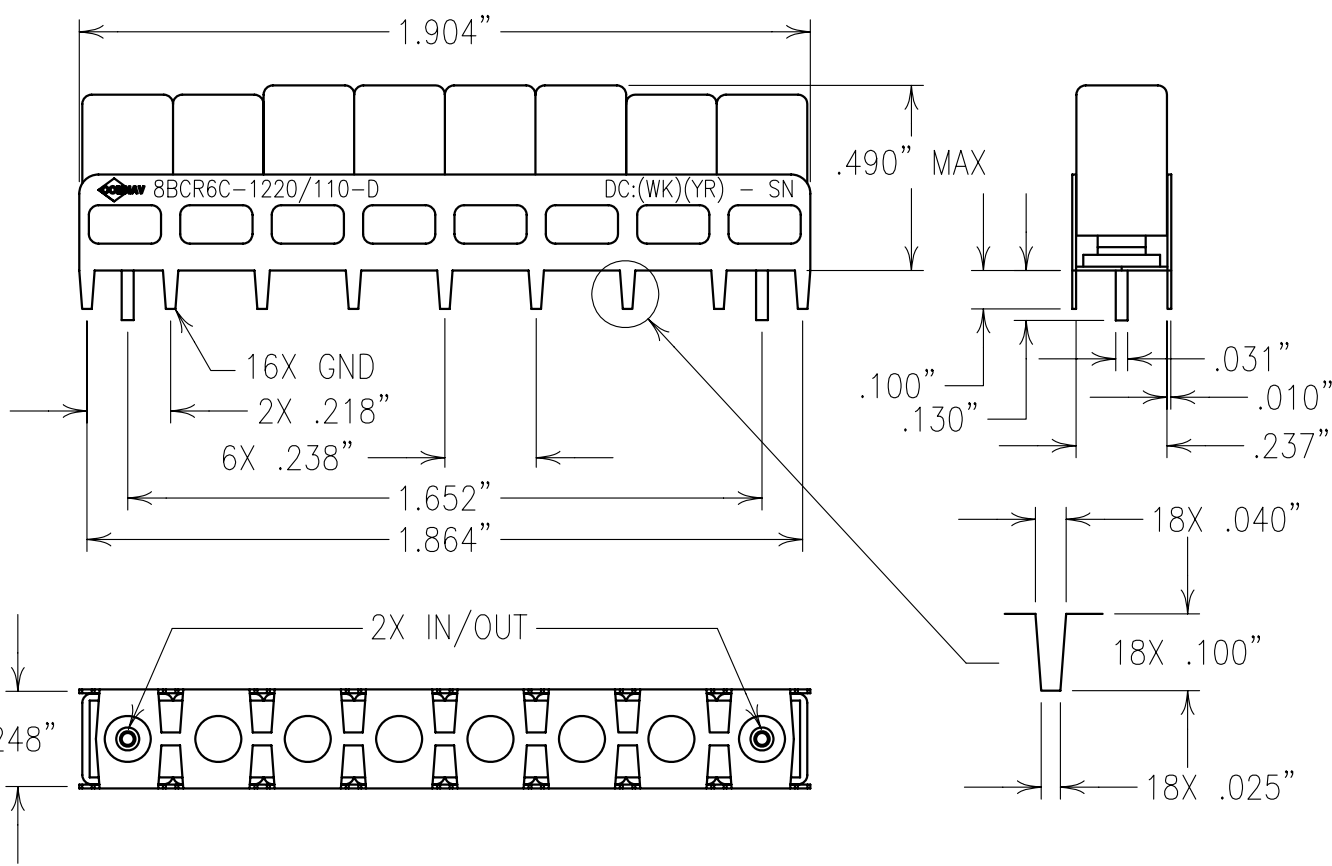


ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	1220 MHz
PASSBAND BANDWIDTH:	80 MHz
PB INSERTION LOSS:	6.0 dB MAX
PASSBAND RETURN LOSS:	>14 dB
PASSBAND FLATNESS:	<0.4 dB
GROUP DELAY (LINEAR):	±1.0 nSEC
GROUP DELAY (PARABOLIC):	<9.0 nSEC
GROUP DELAY (RIPPLE):	<0.7 nSEC
REJECTION:	
>80 dBc:	900, 980 MHz
>75 dBc:	1080 MHz
>45 dBc:	1360 MHz

**COPY**

NOTES:

FILTER IS ROHS COMPLIANT.  
 FILTER MAY BE LABELED OR ETCHED.

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.								A
ENGLISH / METRIC ENGLISH	CHECKED BY							
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY PBF	II	14MAY07	KJR	DEV.	INI. ISS. PER 2668		
	ENGINEER KJR	REV	DATE	BY	DCN No.	REMARKS		
ENGLISH (INCHES) .XX ±.02 .XXX ±.010	METRIC (MM) .X ±.5 .XX ±.25	SCALE 2:1	APPLIC: CERAMIC COAXIAL FILTER					
ANGLES ± 0° 30'	DATE 17MAY07	TITLE: 8BCR6C-1220/110-D						
FINISH: JACKET: NICKEL/SILVER RESONATOR: SILVER					DRAWING No. 010732		SHEET OF 1 1	