



2

1


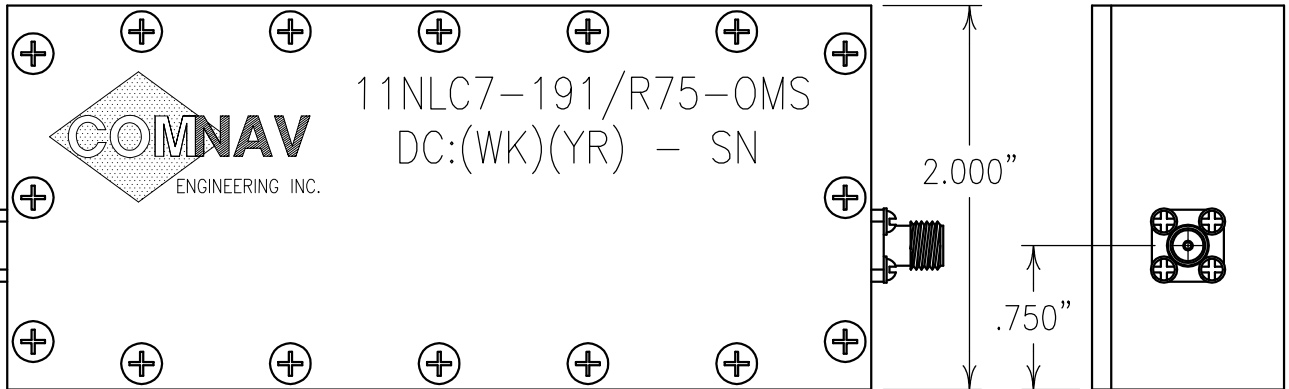


ELECTRICAL CHARACTERISTICS	
CENTER FREQUENCY:	191 MHz
PASSBAND 1:	100-135 MHz
PASSBAND 1 LOSS:	1.0 dB MAX
PASSBAND 2:	250-500 MHz
PASSBAND 2 LOSS:	1.0 dB MAX
SLOPED REJECTION:	
172-191 MHz:	17 dB MIN, 23 dB MAX TO 14 dB MIN, 20 dB MAX
191-216 MHz:	14 dB MIN, 20 dB MAX TO 5 dB MIN, 11 dB MAX
P.B. RETURN LOSS:	10 dB MIN
PASSBAND MAX	
GROUP DELAY:	10 nSEC
PHASE TRACKING	
OVER SETS OF 4: ±5° IN P.B.	

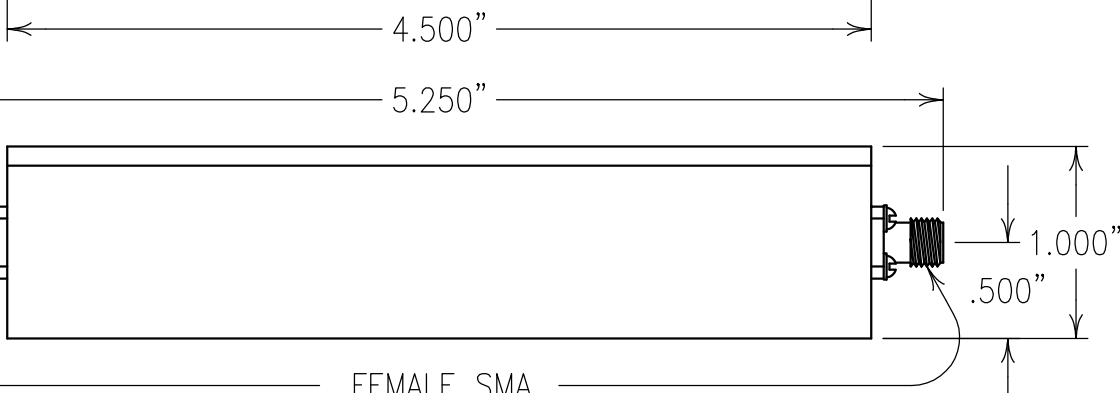

FEMALE SMA

**COPY**

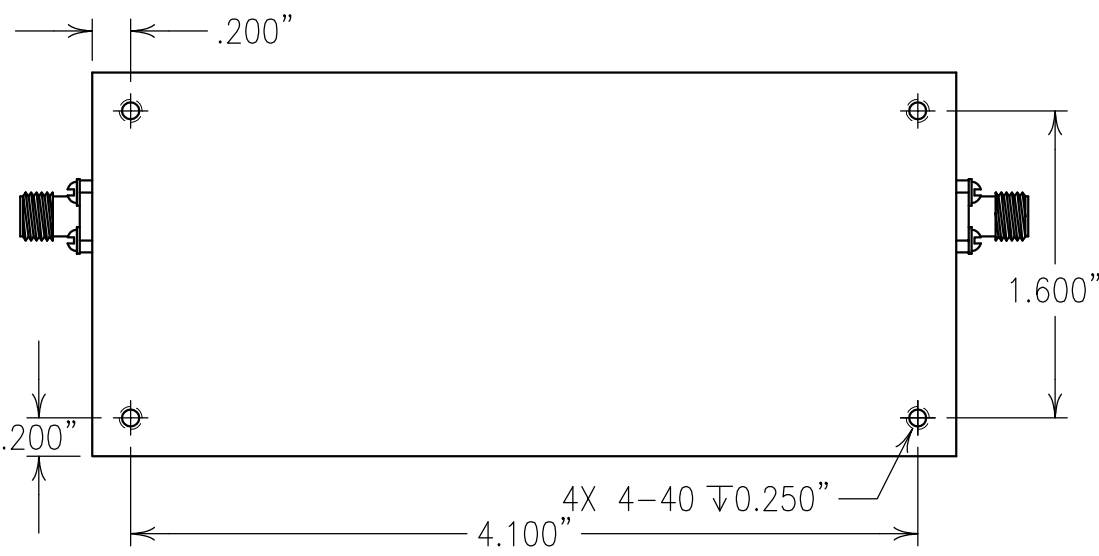

Confidential and Proprietary information of ComNav Engineering Inc. Do Not Duplicate or Use Without Permission. ComNav Engineering Inc. claims Copyright in this document as of the Creation, last revision, and last updated dates. All Rights Reserved.

ENGLISH / METRIC ENGLISH	CHECKED BY				
TOLERANCES UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 / OR BETTER REMOVE ALL BURRS	DRAWN BY PBF				
	ENGINEER KJR	II	23OCT07	KJR	DEV. INI. ISS. PER 2766
		REV	DATE	BY	DCN No. REMARKS

ENGLISH (INCHES) .XX ±.01 .XXX ±.005	METRIC (MM) .X ±.2 .XX ±.13	SCALE 1:1	APPLIC: COAXIAL FILTER
ANGLES ± 0° 30'	DATE 08NOV07	TITLE: 11NLC7-191/R75-0MS	SHEET OF 1 1

MATERIAL: ALUMINUM	DRAWING No.
FINISH: BRIGHT TIN	0L0792

